


# PR990C

## PR Power Diesel Generator Specifications

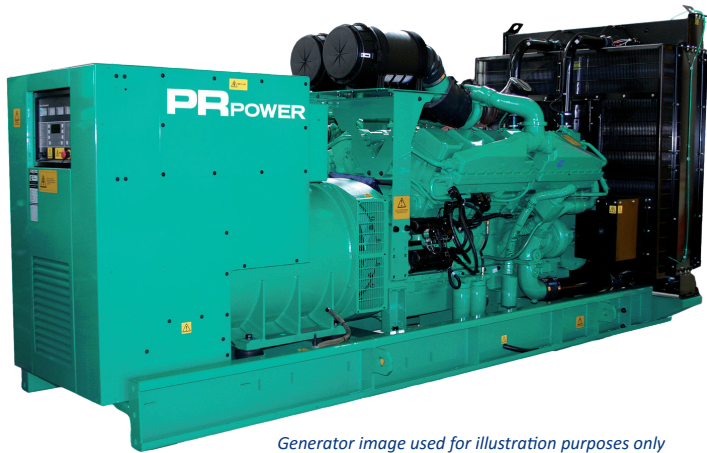

Generator image used for illustration purposes only

PR Power's range of diesel generators have been designed and manufactured to meet Australian and European standards and are available for sale Australia wide.

The PR990C is a three phase, robust, open set generator ideally suited for mining, construction and rental applications. Additional accessories or modifications, including parallel and synchronising functions, are also available on request.

In addition to the PR range of generators, PR Power also have available mobile lighting towers and water solution equipment Australia wide.

For more information on our range of generators and other equipment contact our office today on 1300 399 499 or visit our website at [www.prpower.com](http://www.prpower.com).

### KEY FEATURES

- 4 x12v set mounted battery, with lockable isolator
- 7hr run, bunded base fuel tank to contain all fluid spills (Comply to AS1940-2004 and EPA 2012 standards)
- Emergency stop button located on either side of the unit
- Corner fittings to to ISO1161. Four point lifting
- Fork lift pockets
- Engine/alternator resiliently mounted on steel base frame

### TECHNICAL DATA

#### GENERATOR SPECIFICATIONS

Type	Synchronous
Three phase (Prime) power	900kVA/7200kW
Voltage/Frequency	415V/50Hz
Amps	1252A
Insulation Class	H
Protection	IP23
Alternator Brand	Brushless Stamford
Alternator Model	LVI634D

#### ENGINE SPECIFICATIONS

Engine type	Cummins KTA38G2A	
Cylinders	12	
Displacement	37.5L	
Engine speed	1500rpm	
Intake System	Turbocharged	
Cooling system	50°C	
Coolant Capacity	194L	
Oil Capacity	135L	
Governor	Electronic	
Fuel type	Diesel	
Fuel Consumption	100%	50%
	181L/h	93L/h

#### GENERAL SPECIFICATIONS

Fuel tank capacity	1450L
Controller	DSE7420
Auto Engine Protection Shutdown (Deep Sea Control Panel)	<ul style="list-style-type: none"> <li>▪ RS485 output</li> <li>▪ Auto remote</li> <li>▪ Manual Start</li> <li>▪ Robust digital display package</li> <li>▪ Easy menu navigation</li> <li>▪ Advanced protection technology</li> </ul>

#### Generator - Dimensions

Dimensions (LxWxH)	4440x1720x2425mm approx.
Dry Weight	6,607kg approx.

**Standby Rating:** These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

**Prime Rating:** These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

**Standard Reference Conditions:** Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

**Note:** kVA ratings subject to ambient temperature/altitude/site conditions. Engine kW rating may vary +/- 3%.

t. 1300 399 499

e. [sales@prpower.com](mailto:sales@prpower.com) | w. [www.prpower.com](http://www.prpower.com)

**PRPOWER**  
Performance and Reliability